



Connector Location A

Connector Location B

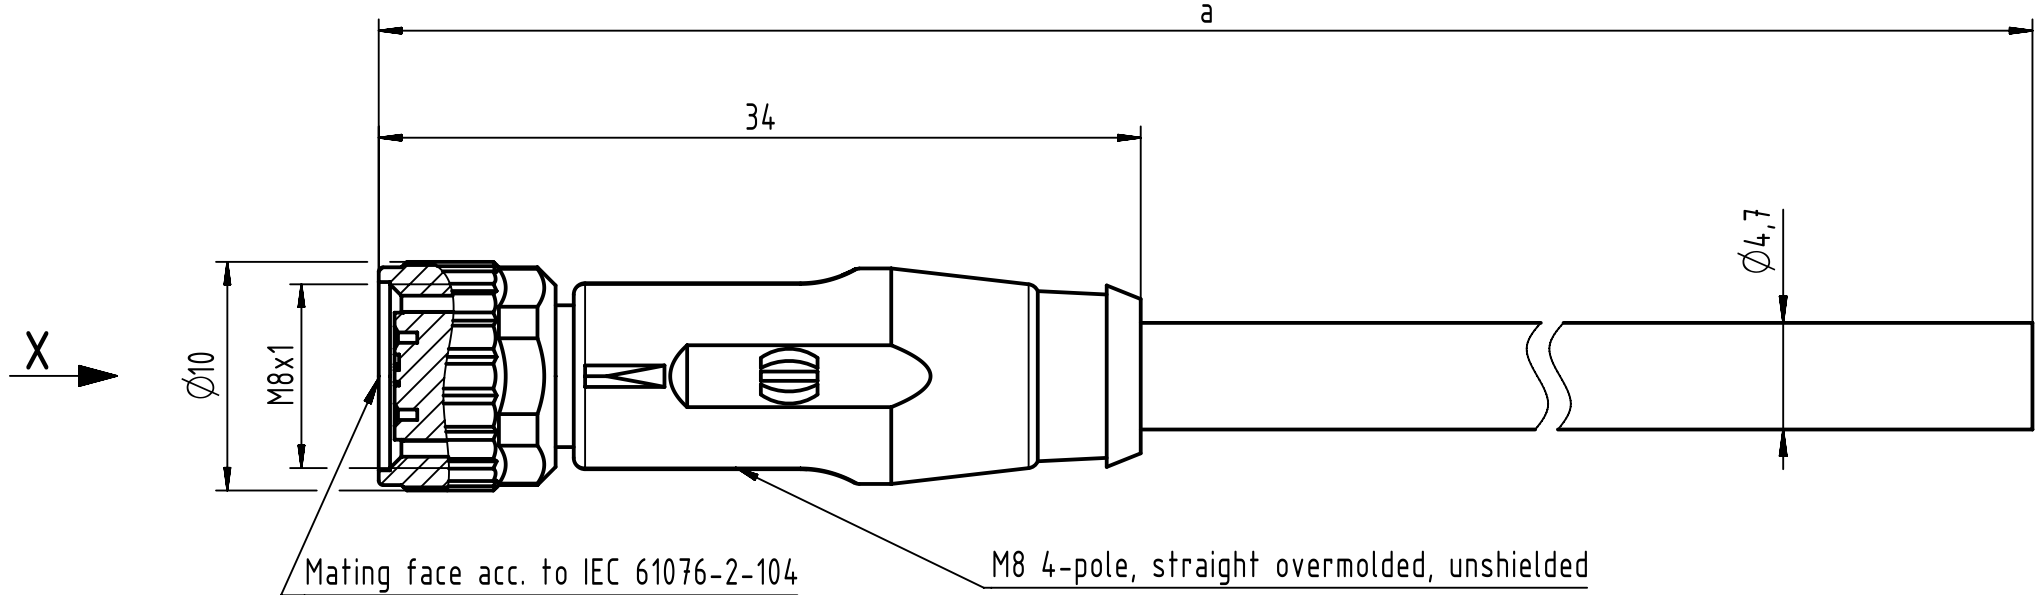


X
female



Loading-Plan

- 1 brown
- 2 white
- 3 blue
- 4 black

- Protection level: IP67
- Temperature range: -25°C ... +80°C

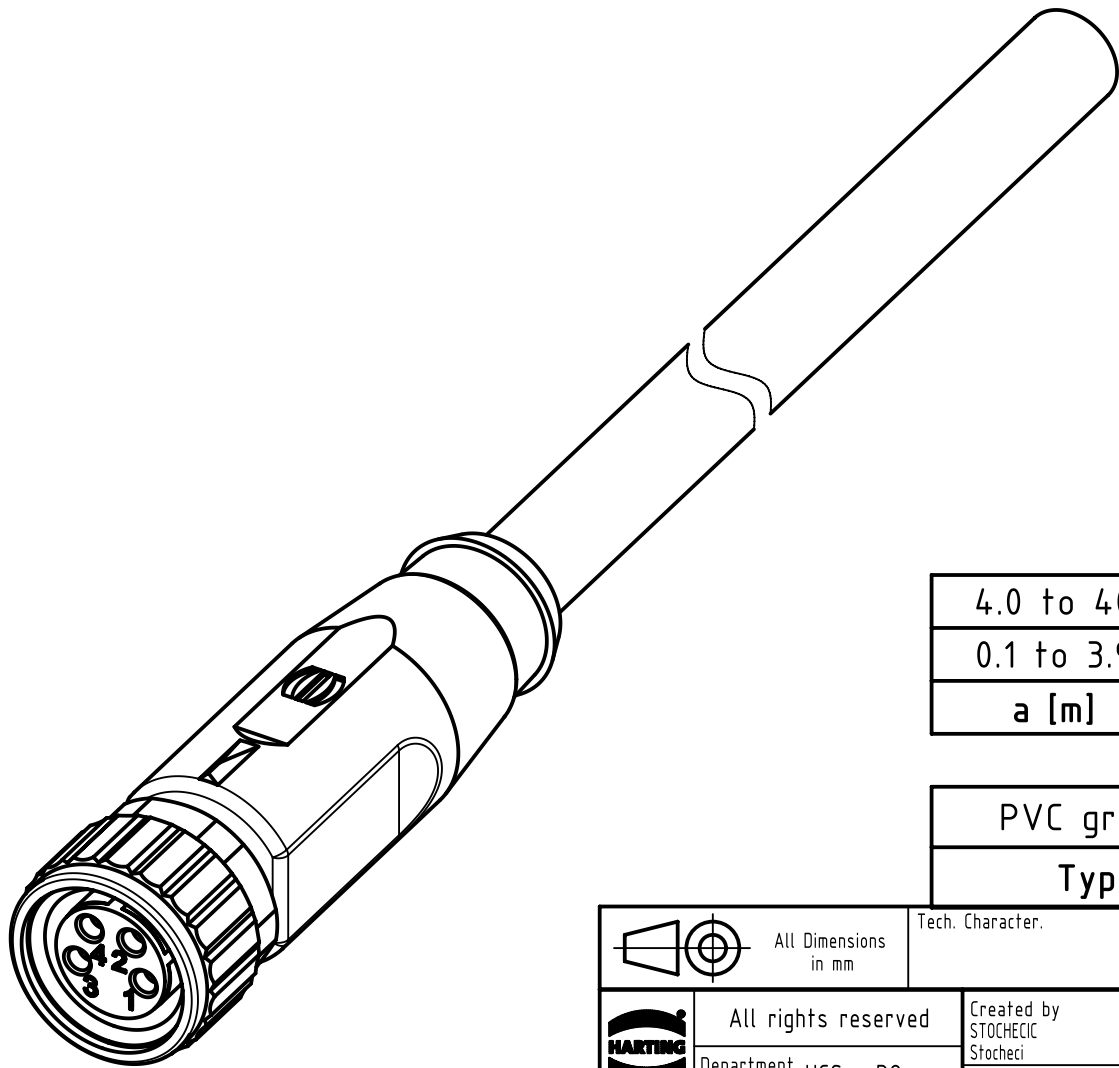

4.0 to 4.0	±1%
0.1 to 3.9	+0.04
a [m]	Tolerance

PVC grey, 4x0.25mm ²	21348100481XXX
Type of cable	Part no.

length in "1m" step	40	XXX=400
	39	XXX=390
	.	.
	12	XXX=120
	11	XXX=110
length in "0.1m" step	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
	0.1	XXX=001
Step	a [m]	XXX

All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
All rights reserved		Created by STOCHECIC Stochei		Inspected by COSTEA Costea		Standardisation MUNTEANV Muntean	
Department HCS - RO		Date 2019-01-11		State Final Release		Doc-Key / ECM-Nr. 100577970/UGD/009/B 500000145294	
HARTING Customised Solutions D-32339 Espelkamp		Title M8 Cable Assembly 4-poles st/- f/-		Rev. B		Page 1/1	
Type TB		Number 21348100481XXX					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HARTING:

[21348100481100](#) [21348100481015](#) [21348100481020](#) [21348100481075](#) [21348100481005](#) [21348100481010](#)
[21348100481050](#) [21348100481040](#) [21348100481060](#)